


## FEC/HV/WF 12.5 kV HIGH VOLTAGE POLYESTER CAPACITORS

These capacitors are constructed with polyester dielectrics and aluminium electrodes.

Wrapped with polyester tape, end filled with epoxy resin, fitted with a PVC sleeve.

SPECIFICATION	
Capacitance Range	10nF
Capacitance Tolerance	10%
Rated Voltage	12.5 kV DC
Temperature Range	- 25°C to 85°C
Power Factor	0.01 @ 1 K Hz
Termination	0.8 mm Tinned Copper Wire
Voltage Rise Time	> 500 V/ $\mu$ s
Temperature Coefficient	440 ppm / °C
Test Voltage	1.25 x Working Voltage
Approvals	BS, EN, ISO 9001-2008

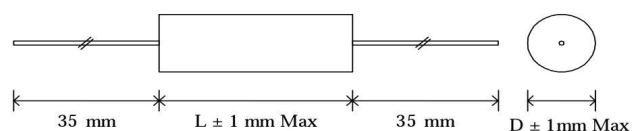

Capacitance nF	Length mm	Diameter mm
10 nF	53.0	21.0