


Rectifiers

AXIAL LEADED

HERMETICALLY SEALED

Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current (I _o)	Reverse Current @V _{rw} (I _r)		Forward Voltage @I _F =I _o (V _f)	1 Cycle Surge Current (I _{fsm})	Reverse Recovery Time (T _{rr})	Storage Temperature (T _{stg})	Out Size code
			25°C	100°C					
			μ A	μ A					
AF03-30F (HVRT300)	30	30	2	10	40	3	100	-40 ~ +125°C	F

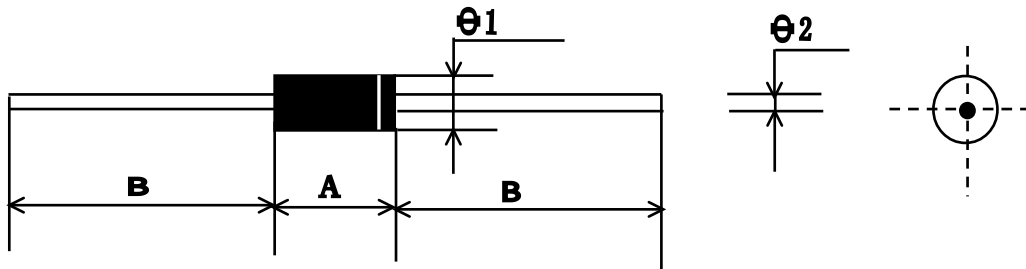

	A	B	Φ 1	
F	12	25	3.0	0.6

unit : (mm)